

# UPRIGHT

## AP750




Note: Optional Steam Condenser available

### FEATURES

- **Warranty** – 5 years on the control board, 2 years parts and labour – 5 years on the entire machine available (conditions apply)
- Made tough in our factory in Caves Beach NSW
  - Robust 304 Stainless steel hand made cabinet
  - Heating Boiler made from Stainless steel 316
  - Stainless steel wash and rinse arms
  - Large 304 Stainless Steel Filters / Scrap Trays
- **Connects to cold water and is always ready** (no waiting once machine is at operating temperature)
- Robust 880w German wash pump
- Reliable German electrical contactors
- Reliable European heating elements made from the Incoloy® 825, highly resistant to corrosion and cracking so elements last longer
- Ergonomic pass through dishwasher
- Recirculating wash system
- Cleans up to 1080 plates per hour
- 60/90/120sec, manual and descale cycle options
- Three phase power connection
- Automatic detergent and rinse aid injection
- Hood safety cut out switch
- Rinse temperature controlled by thermostop function for sanitation compliance
- Large useable wash height 470mm
- Standard drain pump for easy installation
- Easy servicing access for minimal disruption

### INCLUSIONS

- 2 x Plate racks 500mm x 500mm
- 1 x Cup rack 500mm x 500mm
- 1 x Cutlery container
- 1 x Water connection hose
- 2 x Chemical weights & filters
- 1 x Operating manual

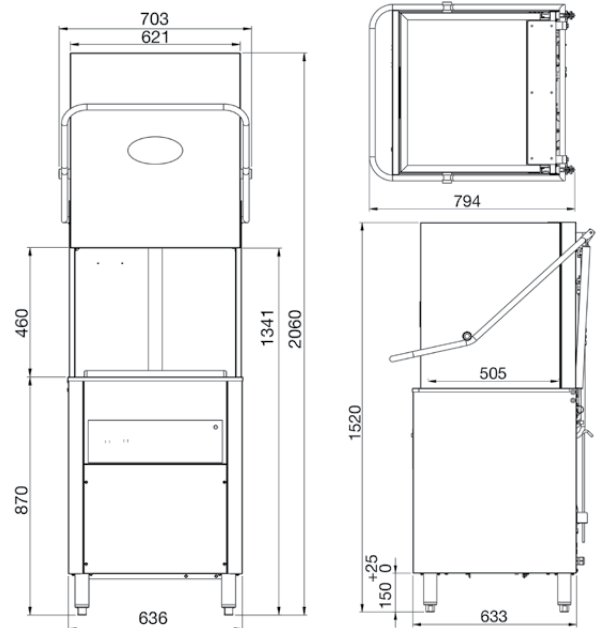

### TECHNICAL DATA

#### Height

|                    |         |
|--------------------|---------|
| Cabinet            | 1370 mm |
| Cabinet inc. legs  | 1520 mm |
| With hood extended | 2060 mm |
| Usable Wash        | 460mm   |

#### Width

|             |        |
|-------------|--------|
| Cabinet     | 640 mm |
| Inc. handle | 703 mm |

#### Depth

|             |        |
|-------------|--------|
| Cabinet     | 635 mm |
| Inc. handle | 785 mm |

#### Capacities

|                     |        |
|---------------------|--------|
| Loads/Hour          | 45*    |
| Water per Cycle     | 2.5L** |
| Wash Pump           | 880W   |
| Wash Tank Litres    | 25     |
| Boiler Litres       | 6      |
| Element (wash)      | 3000W  |
| Element (boiler)    | 10600W |
| Detergent Injection | yes    |
| Rinse Aid Injection | yes    |

#### Temperatures

|                 |       |
|-----------------|-------|
| Wash Degrees C  | 65 °C |
| Rinse Degrees C | 88 °C |

#### Plumbing

|       |               |
|-------|---------------|
| Drain | Drain Pump    |
| Water | ½" BSP (cold) |

#### Electrical

|   |                  |
|---|------------------|
| Volts/Hz/Phase                                  | 415V AC/50Hz/3+N |
| Amps  | 20amps/Ph        |
| Note: this machine has load shedding capability |                  |

\* Subject to incoming water temperature 20°C

\*\* Subject to incoming water pressure

